


Specification according to EN 13297

Type of manufacture	Needled Pile needle felt	ISO 2424
Pile fibre composition	Fibre dyed Polyamide 6	ISO 2424
Dimensions	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)	EN 994
Primary backing	Polyester - polyamide fleece	ISO 2424
Secondary backing	Modified bitumen or DESSO EcoBase®* Polyver®	ISO 2424
Total thickness	9.0 mm 0.35 inch	ISO 1765
Effective pile thickness	4.0 mm 0.16 inch	ISO 1766
Total mass	5000 g/m ² 147.6 oz/yd ²	ISO 8543
Total pile mass	1340 g/m ² 39.6 oz/yd ²	ISO 2424
Effective pile mass	500 g/m ² 14.8 oz/yd ²	ISO 8543
Pile density	0.125 g/cm ³ 0.0045 lb/in ³	ISO 8543
Stroll test	≤ 2.0 kV	ISO 6356
Use classification	33 Commercial - heavy use	EN 1307
Dimensional stability	≤ 0.2 %	EN 986
Impact sound reduction ΔL _w	24 dB	ISO 140-8
Noise reduction	0.19 α _w	ISO 354
Flammability	B _{fl} - s1 (loose laid tested)	EN 13501-1
Light Reflectance Value (LRV)	See right side page per colour	BS 8493
Colour depth (L)	See right side page per colour	CIELAB

* DESSO EcoBase® is a polyolefin based backing.

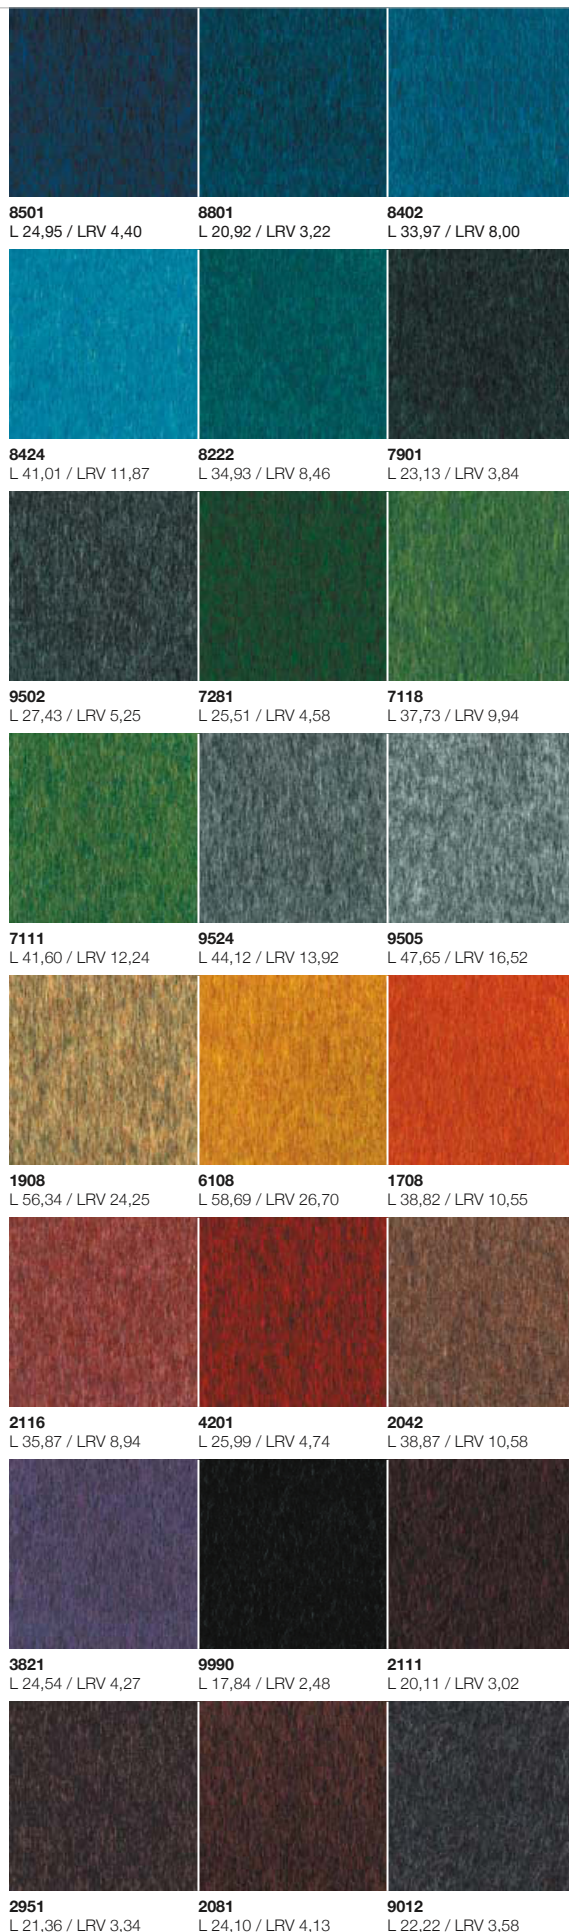

CE Manufactured by

EN 14041
0493-CPD-0002

Desso BV
PO Box 169
NL-5240 AD
Waalwijk