TARALAY IMPRESSION & UNI

gerflor.com

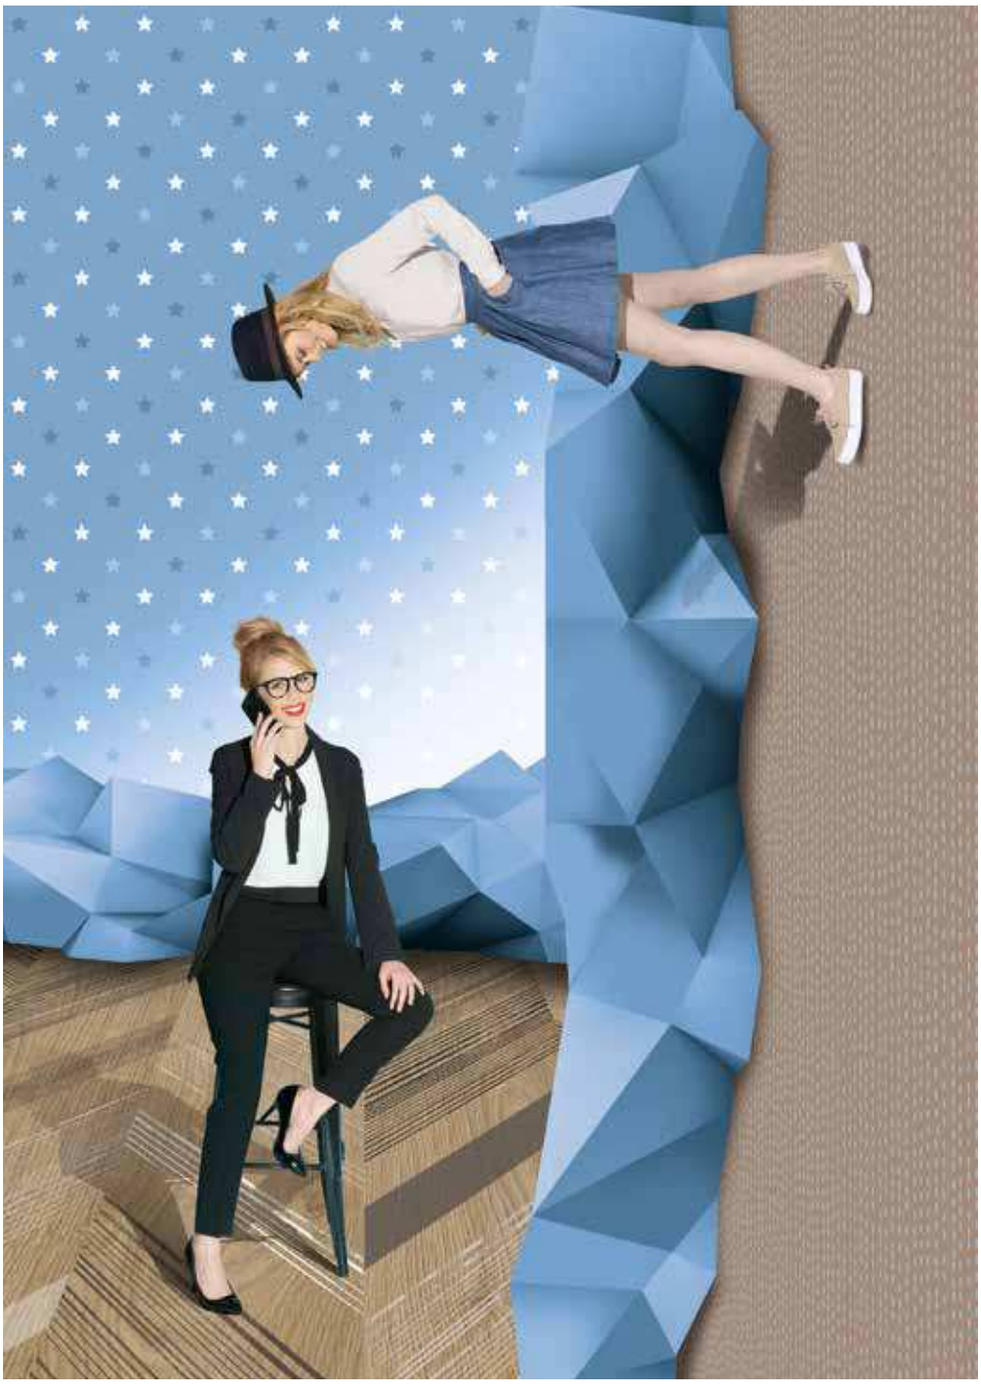

Gerflor®
theflooringgroup

TARALAY IMPRESSION

16.6 cm

0373 - Noma Ice

20 cm

0723 - Charme Pecan

No strip
Continuous design

0719 - Infinity Lichen

No strip
Continuous design

0068 - Renzo Pecan

No strip
Continuous design

0025 - Renzo Taupe

No strip
Continuous design

0726 - Sycamore Dark

16.6 cm

0519 - Noma Beige

No strip
Continuous design

0680 - Infinity Greige

No strip
Continuous design

0725 - Sycamore Light Brown

16.6 cm

0773 - Portobello

11.2 cm
14.2 cm
8.7 cm
6.4 cm

0734 - Loft Chestnut

16.6 cm

0371 - Noma Rustic

10 cm

1314 - Walnut brown

TARALAY IMPRESSION

16.6 cm

0538 - Habana Vinales

16.6 cm

0722 - Herringbone Blond

16.6 cm

0522 - Habana Trinidad

16.6 cm

0724 - Herringbone Chatain

20 cm

0721 - Charme Natural

10 cm

0528 - Walnut Cream

No strip
Continuous design

0720 - Infinity Aube

No strip
Continuous design

0727 - Sycamore Vanilla

16.6 cm

0760 - Moon Island

11.2 cm
14.2 cm
8.7 cm
6.4 cm

0671 - Loft Light Brown

TARALAY IMPRESSION & UNI

0769 - Mohair White

0523 - Cemento Genova

0543 - Cemento Brescia

0767 - Mohair Natural

0524 - Cemento Capri

0766 - Mohair Dark

0525 - Cemento Modena

0770 - Gentlemen Clear

0771 - Gentlemen Grey

0772 - Gentlemen Coffee

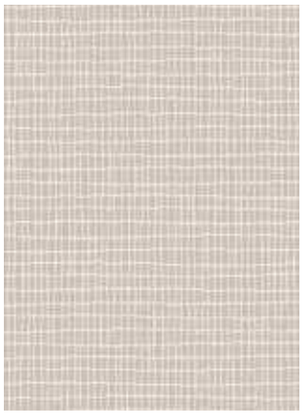

0774 - Trame Clear

0776 - Trame Beige

0777 - Trame Rose

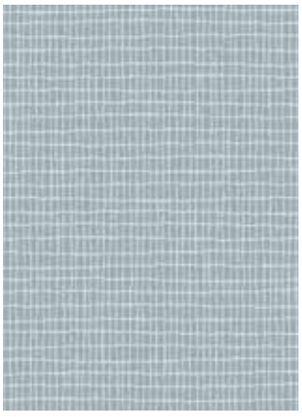

0775 - Trame Blue

0730 - Corner Light Beige

0756 - Kubes Beige



6267 - Uni Beige

0736 - Rice Champagne

0728 - Corner Offwhite

6273 - Uni White

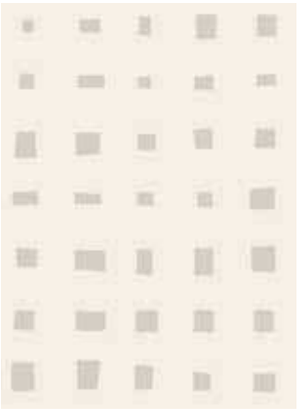

0755 - Kubes White

0763 - Rice Greige

0745 - Nest Metal

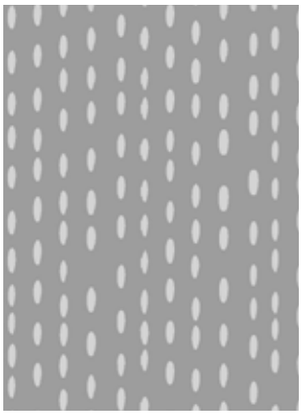

0737 - Rice Souris



6271 - Uni Grey

0729 - Corner Metal

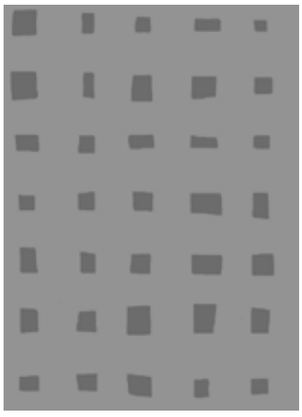

0753 - Kubes Grey

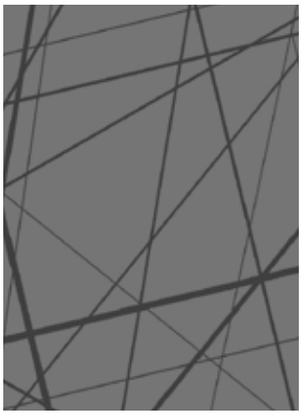

0746 - Nest Black



0778 - Uni Anthracite

0744 - Stars Anthracite

TARALAY IMPRESSION & UNI

0762 - Rice Brown

6265 - Uni Brown

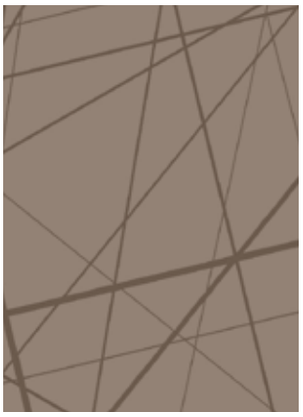

0765 - Nest Taupe

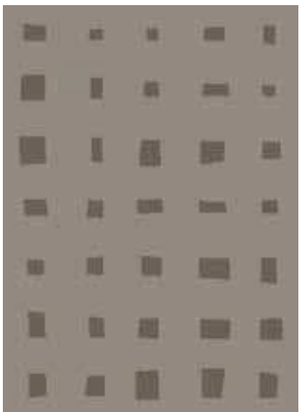

0751 - Kubes Taupe

0741 - Corner Tomette



6270 - Uni Tomette

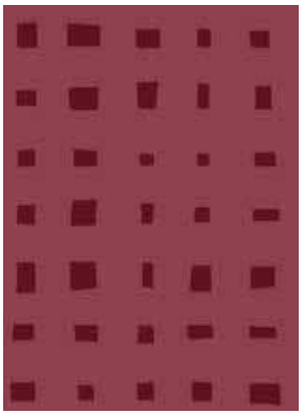

0748 - Kubes Burgundy

0757 - Rice Coquelicot

0738 - Rice Copper

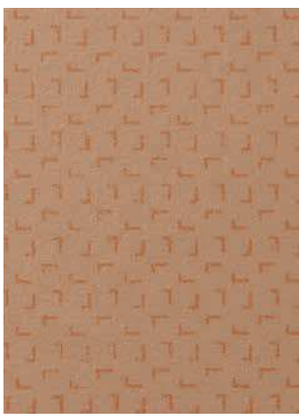

0733 - Corner Copper

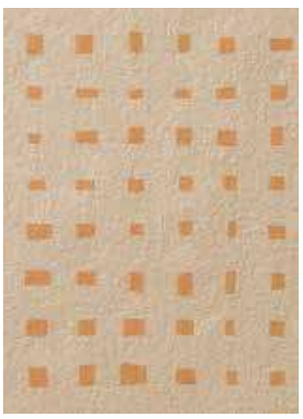

0752 - Kubes Gold

0759 - Rice Mustard

6268 - Uni Sun

0750 - Kubes Sun

6269 - Uni Orange

0764 - Stars Orange

0739 - Corner Anis



6263 - Uni Anis

0735 - Rice Light Green



6262 - Uni Turquoise

0740 - Corner Turquoise

0747 - Kubes Olive



6264 - Uni Olive

0758 - Rice Sea

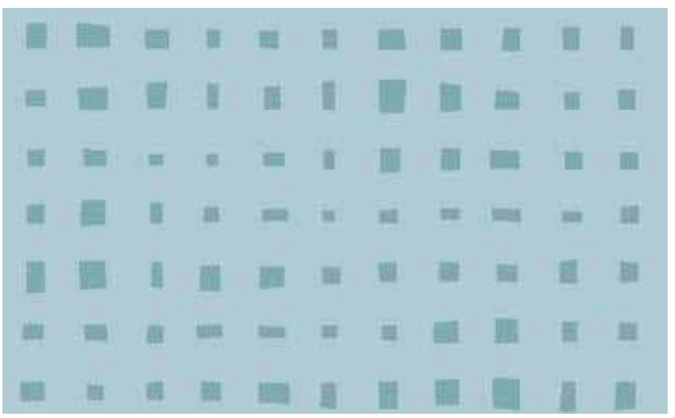

0749 - Kubes Sky

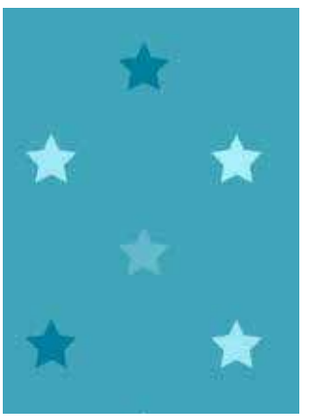

0743 - Stars Baltique

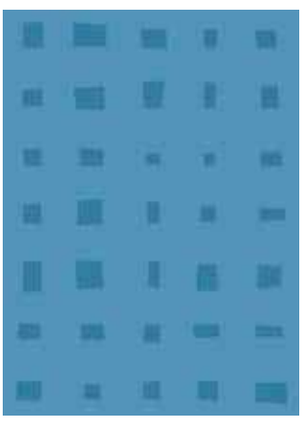

0754 - Kubes Blue

6261 - Uni Blue

0732 - Corner Dark Blue

6260 - Uni Dark Blue

TARALAY IMPRESSION & UNI

gerflor.com

			TARALAY IMPRESSION		TARALAY UNI
			COMPACT	**COMFORT**	**COMFORT**
			Wood, Cemento, Mohair, Nest, Stars, Gentlemen, Trame, Corner, Kubes, Rice	Wood, Cemento, Mohair, Nest, Stars, Gentlemen, Trame, Corner, Kubes, Rice	Uni
DESCRIPTION					
Total thickness	EN ISO 24346 (EN 428)	mm	2.00	3.35	3.00
	ASTM F386-02	inch	0.08	0.13	0.1
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	0.70	0.65	0.65
	ASTM F410-02	inch	0.028	0.026	0.026
Weight	EN ISO 23997 (EN 430)	g/sq.m	2635	2825	2300
Width/length of sheet	EN ISO 24341 (EN 426)	cm / lm	200 / 25	200 / 25	200 / 25
	-	feet - inch	6'6'' / 82'	6'6'' / 82'	6'6'' / 82'
CLASSIFICATION					
Norm/product specification	-	-	EN ISO 10582 (EN 649)	EN 651	EN 651
European classification	EN ISO 10874 (EN 685)	class	34 - 43	34 - 42	34 - 42
Fire rating	EN 13 501-1	class	B_{fl}-s1	B_{fl}-s1	C_{fl}-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2
Slip resistance wet: ramp test with oil (1)	DIN 51 130	class	R10	R10	R10
PERFORMANCES					
Wear resistance	EN 660.2	mm^3	≤ 2.0	≤ 2.0	≤ 2.0
Wear group	NF 189	group	T	T	T
Type binder content	EN ISO 10582	Type	I	-	-
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.40	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1 (EN 433)	mm	≤ 0.10	≤ 0.20	≤ 0.20
Residual indentation (average measured value)	-	mm	≈ 0.03	≈ 0.08	≈ 0.11
Impact sound insulation	EN ISO 717-2	dB	8	19	17
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK	OK	OK
Thermal conductivity	EN ISO 10456 (EN 12524)	W/(m.K)	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	Protecsol® 2	Protecsol® 2	Protecsol®
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) (2)	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth
ENVIRONMENT / INDOOR QUALITY AIR					
TVOC after 28 days	ISO 16000-6	$\mu g/m^3$	< 10	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®	Floorscore®
CE marking					
CE	EN 14041	-	DS	DS	DS
		-	B_{fl}-s1	B_{fl}-s1	C_{fl}-s1

(1) For lifetime sustainable wet resistance, please refer to Tarasafe ranges
(2) The implementation of an effective cleaning regime is the best defence against infection

Product description and technical data sheet available in various languages. See our Gerflor Country websites.

Technical data sheets and product descriptions for TARALAY IMPRESSION COMPACT and COMFORT PLUS (0.9mm wearlayer) available in the Taralay Impression & Uni product guide.

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

⚠ Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

IMPORTANT: The information contained in this document is valid from 01/04/2017 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

TARALAY IMPRESSION & UNI, **LESS SPEAKING FOR MORE ACTIONS**

COMPOSITION
100 % REACH compliant

RECYCLABILITY
100 %

INDOOR AIR QUALITY
100 times lower than norm requirements (TVOC < 10 ug/m^3 after 28 days)

LCA
Eco-designed according to a product-specific life cycle analysis

WELLNESS
Anti slip R10
Comfort version: Walking comfort <65 dB (best certification) and impact sound insulation - 19 dB

Be **CONNECTED**!

www.gerflor.com

Gerflor® theflooringgroup

Crédit photos : Lovenly, Oeil Ecoute - Réalisation : coco & co - 06/2017 - Article code: Z001 3119 - Indicative documentation cost: 13.50 €