


## Lindau LV

Manufacturing process	Needlefelt	ISO 2424
Surface aspect	Flat	ISO 2424
Width	200 cm, 400 cm	
Backing	LV	ISO 2424
Pile yarn composition	100% PP	ISO 2424
Pile weight	630 gr/m <sup>2</sup>	
Total weight	790 gr/m <sup>2</sup>	+/- 15% ISO 8543
Total height	4,5 mm	+15% / -10% ISO 1765
Overall use class	Commercial 33, Areas with heavy use	EN 1307
Luxury class	LC1	EN 1307
Castor chair suitability	Yes, permanent use	EN 985
Stair suitability	Yes, incidental use	EN 1307
Colour fastness to light	≥ 5	ISO 105-B02
Colour fastness to rubbing, wet and dry	≥ 4	ISO 105-X12
Colour fastness to water	≥ 4	ISO 105-E01
Dimensional stability	Shrinkage ≤ 1,2 % Extension ≤ 0,5 %	ISO 2551 ISO 2551
Electrostatic charging	< 2kV	ISO 6356
Thermal resistance	0,07 m <sup>2</sup> .K/W	ISO 8302
Slip resistance	> 0,3 Machine direction > 0,3 Crossdirection	EN 13893 EN 13893
Flammability	Cfl,s1	EN 13501-1
Prodis-ID (GuT)	E1146BAA	www.pro-dis.info
TÜV PROFICERT product	Certificate number: 70 710 5617-3	

## Floorsymbols



## Certificates

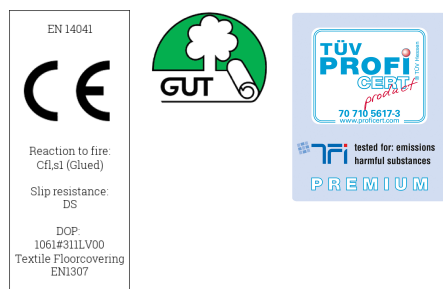

ISO 9001:2015-certified processes  
ISO 14001:2015-certified processes

2019-06-19

Vebe Floorcoverings b.v. products are to be installed in full accordance with Vebe installation instructions and recognised trade standards. An effective, regular cleaning and maintenance programme is vital for retaining a high appearance level. Vebe products should only be used as floorcoverings. Note: Vebe Floorcoverings b.v. reserves the right to adapt this specification without giving prior notice. For the latest versions of the technical specifications, check our internet site.

In the area of office chairs we recommend to use mats made of polycarbonate. This extends the life of your carpet.

Laying: Fully glued with adhesive that withstands chair castors.

The producer reserves the right to change technical specifications. Due to variations in raw materials and production circumstances, the product may vary from batch to batch.